



# Installation cut-outs

BORA S Pure


**Installation cut-out PURSA (kitchen counter 600):**

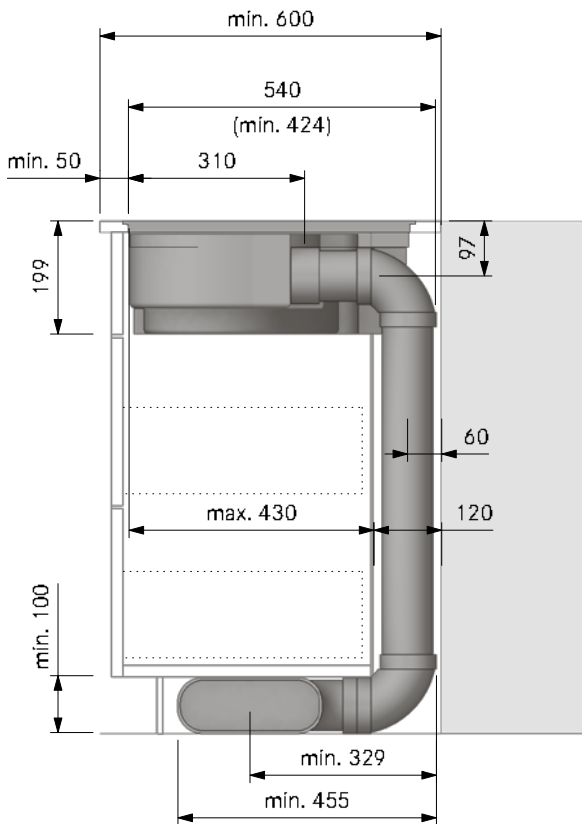


**Installation cut-out PURSA (kitchen island):**

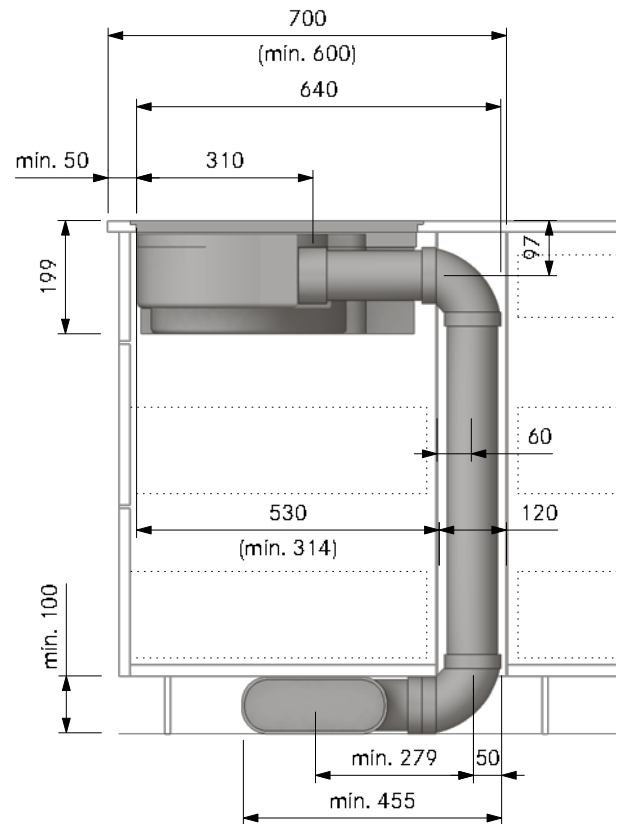

**Installation cut-out PURSU (kitchen counter 600):**

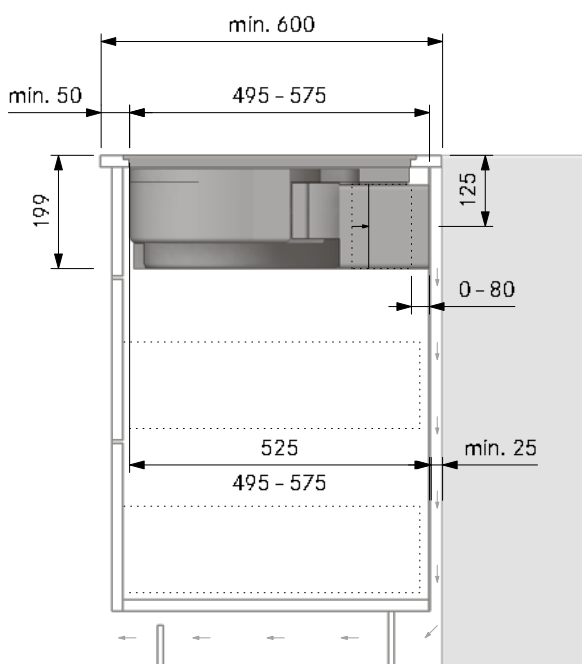

**Installation cut-out PURSU with reversible false floor (kitchen island):**

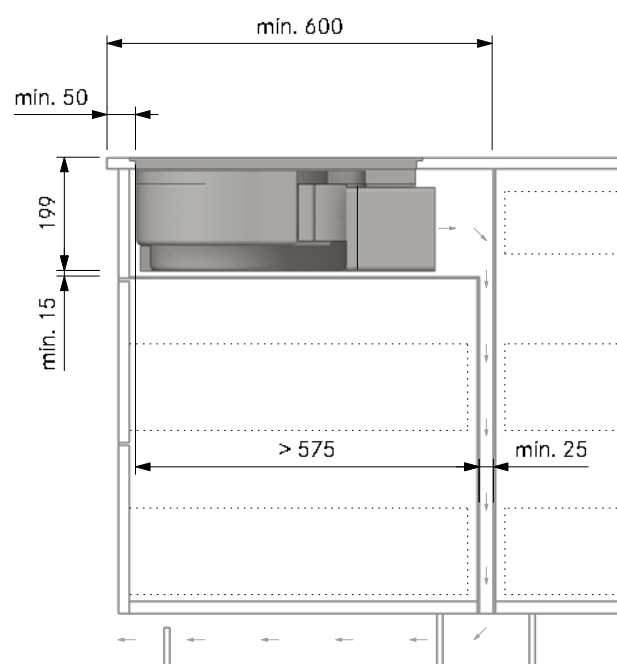

To ensure optimum extraction performance, a return flow aperture of at least 500 cm<sup>2</sup> for the air recirculation hood must be guaranteed.