


XBO

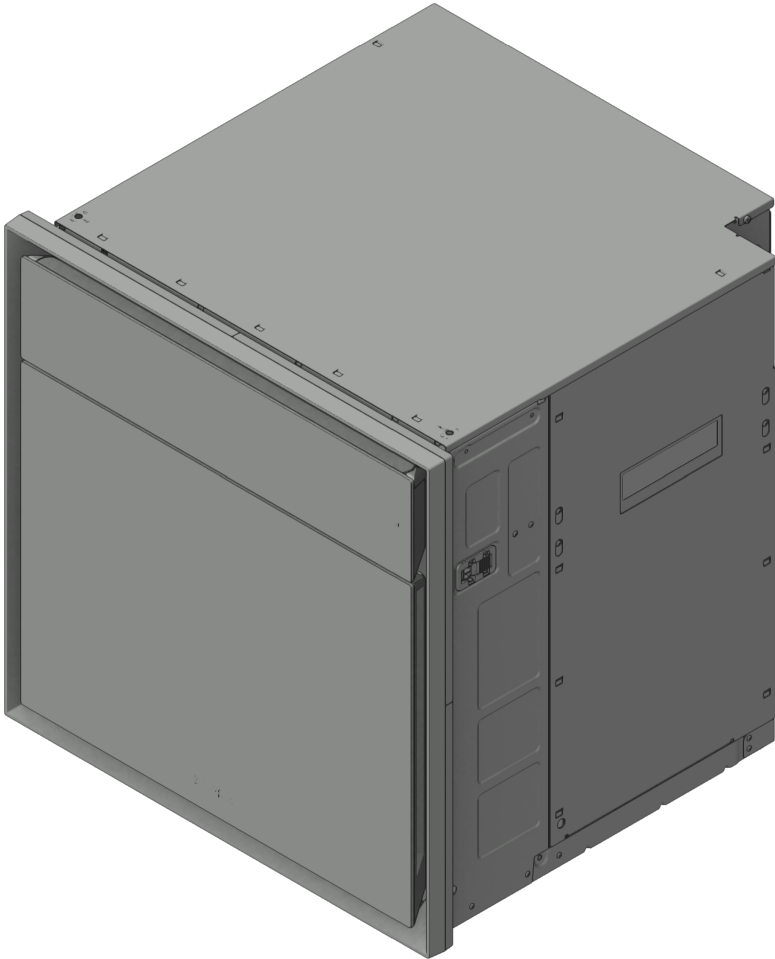

Flush version without frame spacer

Count	Item BORA
1	XBO X BO Steam oven
Please check for accuracy.	

(delivery condition)
Protruding version with frame spacer

Count	Item BORA
1	XBO X BO Steam oven
Please check for accuracy.	

Protruding version with two frame spacers

Count	Item BORA
1	XBO X BO Steam oven
	Item BORA Accessories
1	XBORS X BO Frame Spacer
Please check for accuracy.	

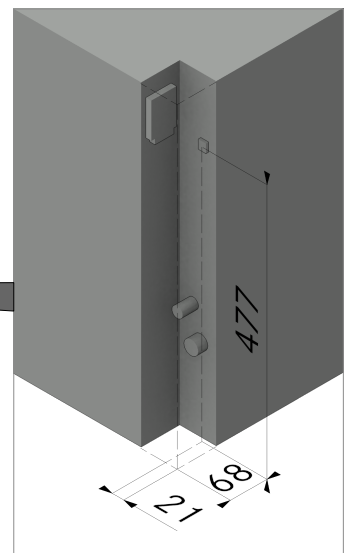
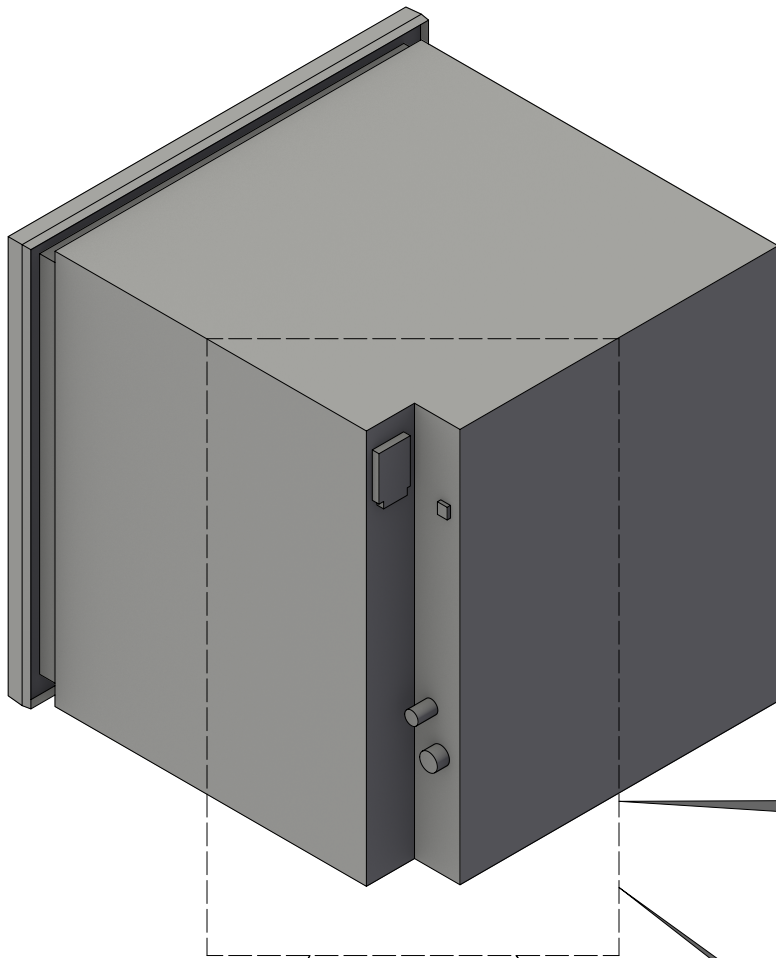


Fig. 1: RJ45 connection

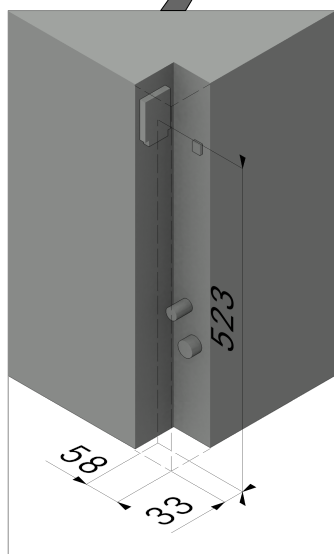


Fig. 2: Mains connection

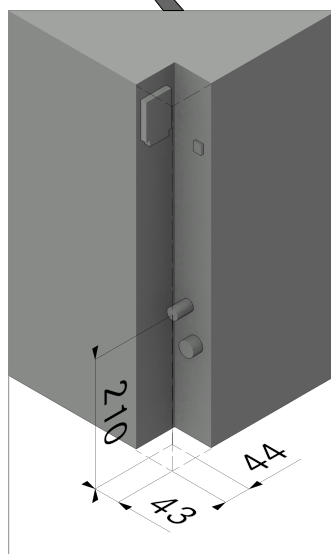


Fig. 3: Waste water connection

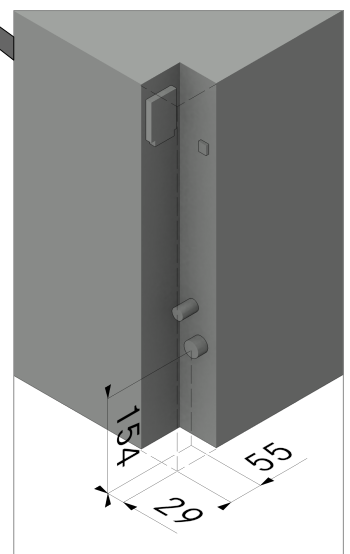


Fig. 4: Fresh water connection

MODEL PLAN
REFERENCE NUMBER
COMPOSITION


MP_9500
Steam oven


DRAWN 2021

BORA

LAYOUT

3D

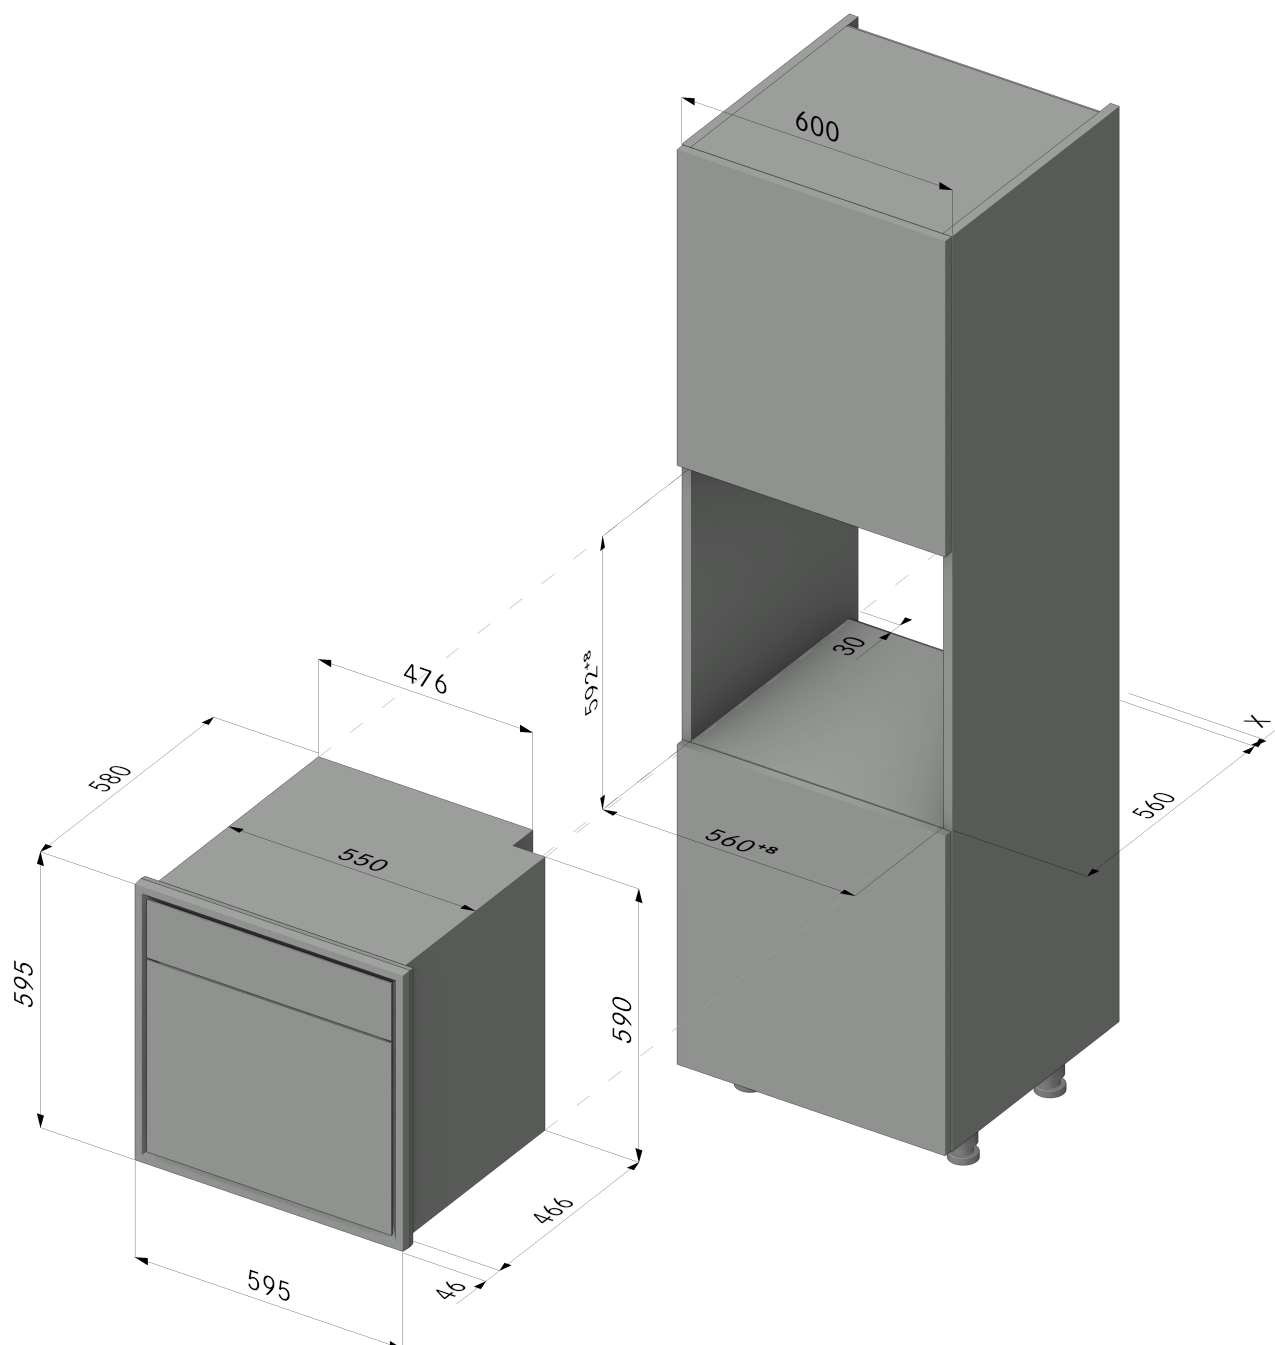

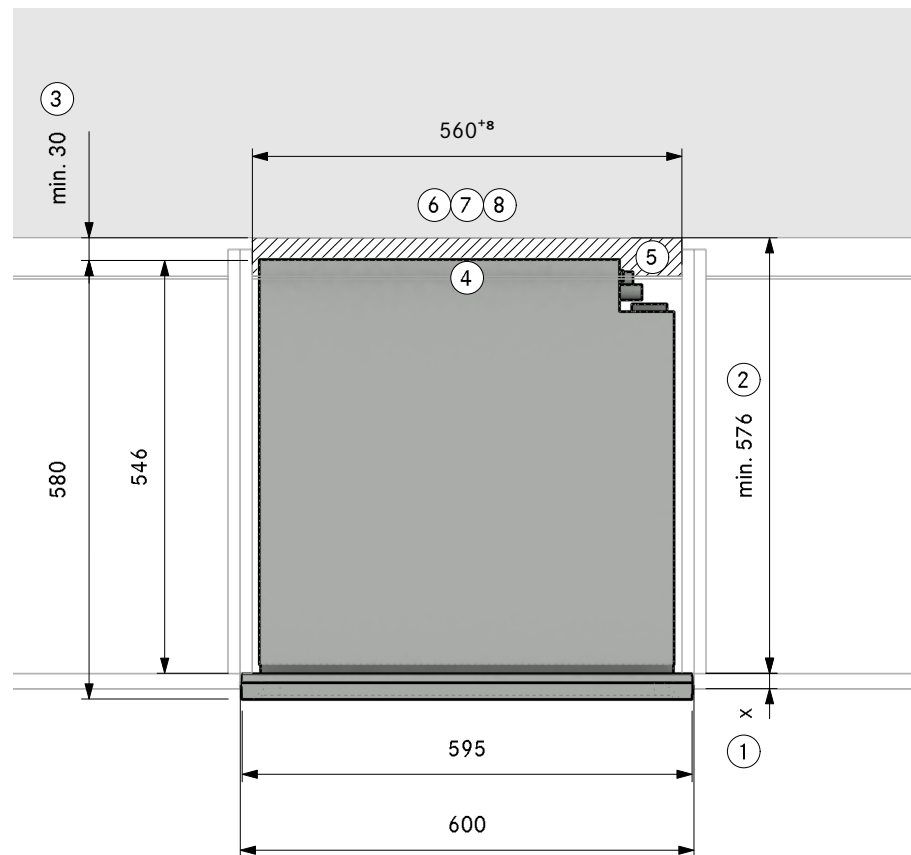


- ①. Dimensions of the carcass front edge
- ②. Dimension carcass front edge to rear edge front
- ③. Minimum 30 mm gap between the appliance's back panel and the adjacent element
- ④. No back panel behind the appliance
- ⑤. At least 30mm between the back of the unit and the adjacent structure must be provided for. (Minimum ventilation cross-section of 160cm² in all areas)
- ⑥. Mains water connection (cold, fresh water and waste water) mandatory
- ⑦. Siphon and cold, fresh water connection must be accessible
- ⑧. Minimum return flow opening of 160cm²

Protruding version with frame spacer (delivery condition)


MODEL PLAN
REFERENCE NUMBER
COMPOSITION
LAYOUT

MP_9500
Steam oven
Top

DRAWN 2021



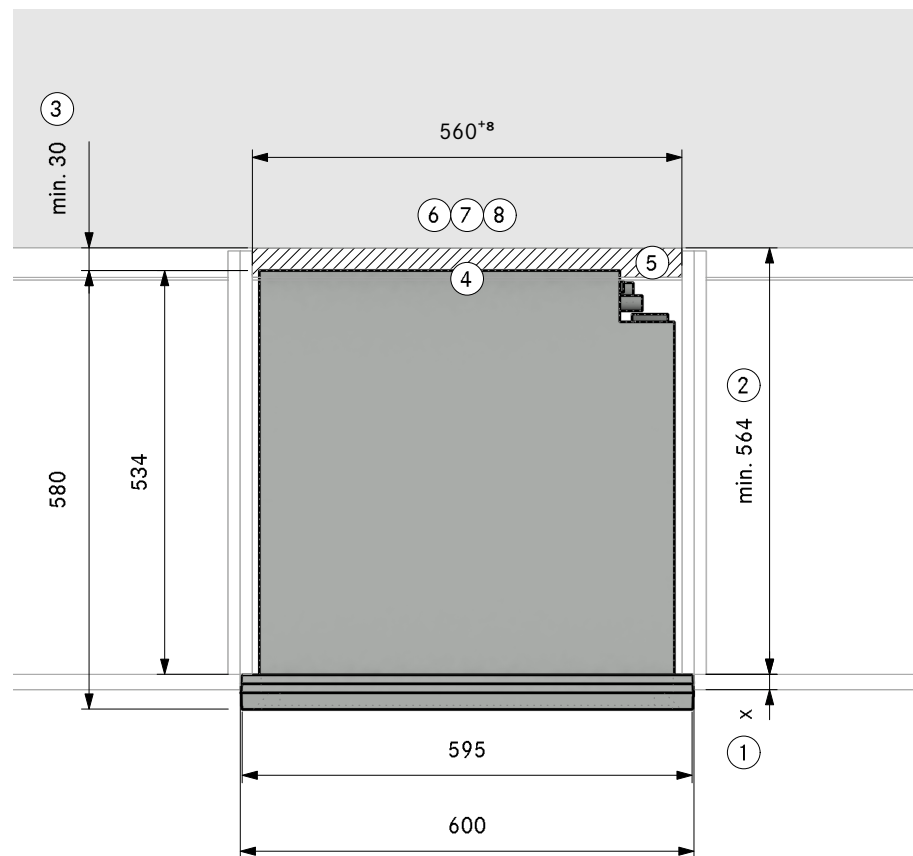


Protruding version with two frame spacers

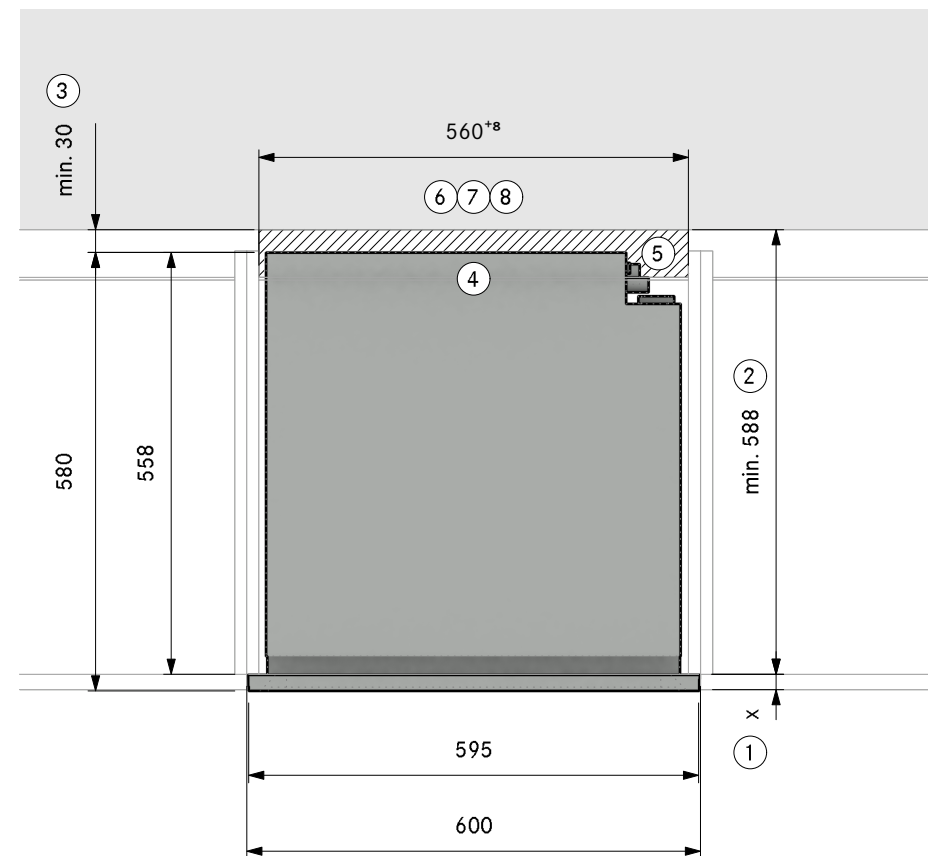




Flush version without frame spacer

- ① The siphon must be positioned at least 100 mm below the appliance connection. If the dimensions are smaller, use the XBOMSU kit for installation in the floor unit (not included).
- ② Minimum 30 mm gap between the appliance's back panel and the adjacent element
- ③ At least 30mm between the back of the unit and the adjacent structure must be provided for. (Minimum ventilation cross-section of 160cm² in all areas)
- ④ Minimum return flow opening of 160cm²

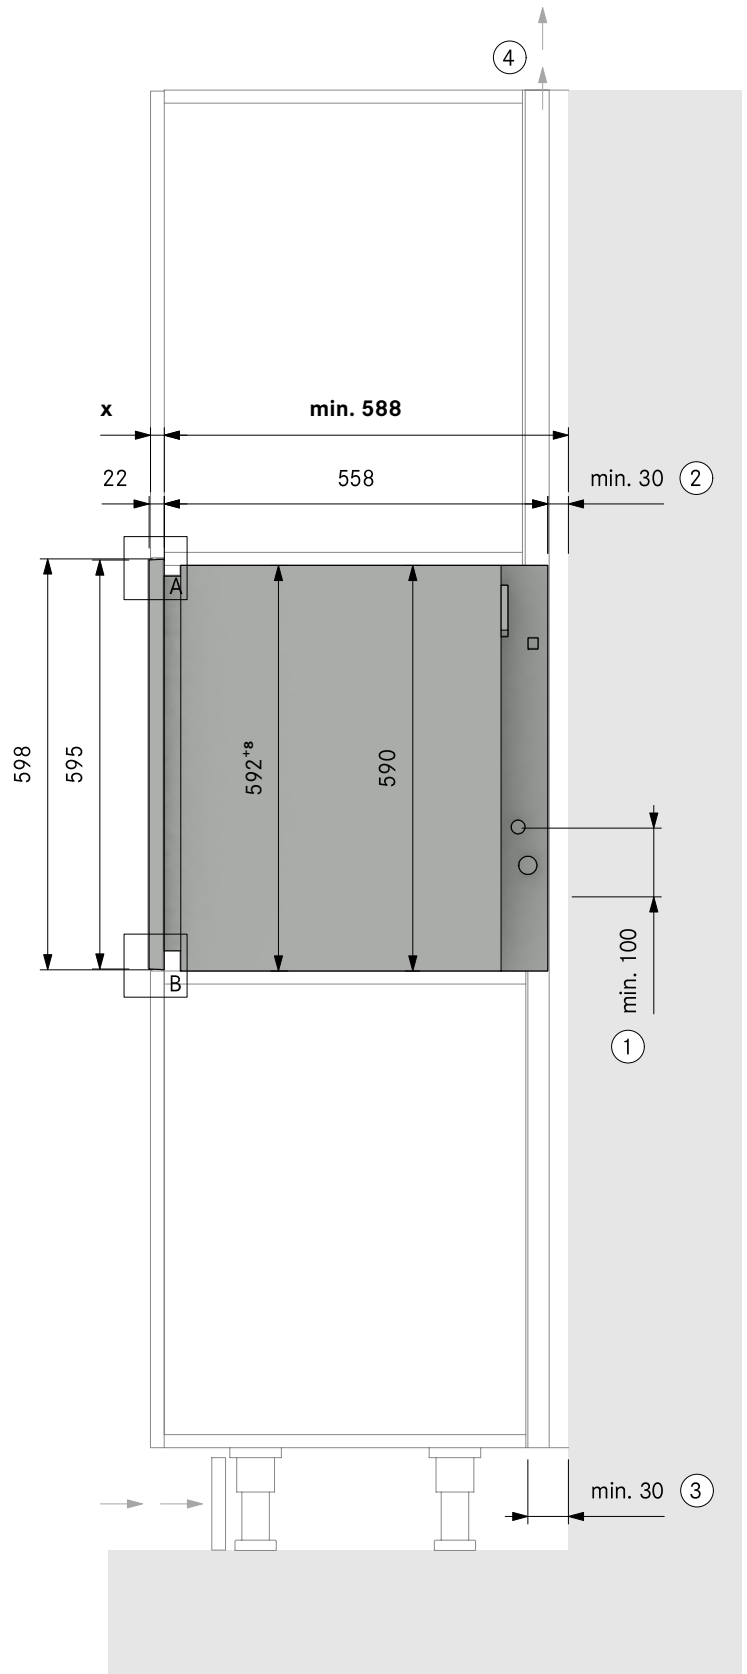

Flush version without frame spacer

- ① The siphon must be positioned at least 100 mm below the appliance connection. If the dimensions are smaller, use the XBOMSU kit for installation in the floor unit (not included).
- ② Minimum 30 mm gap between the appliance's back panel and the adjacent element
- ③ At least 30mm between the back of the unit and the adjacent structure must be provided for. (Minimum ventilation cross-section of 160cm² in all areas)
- ④ Minimum return flow opening of 160cm²

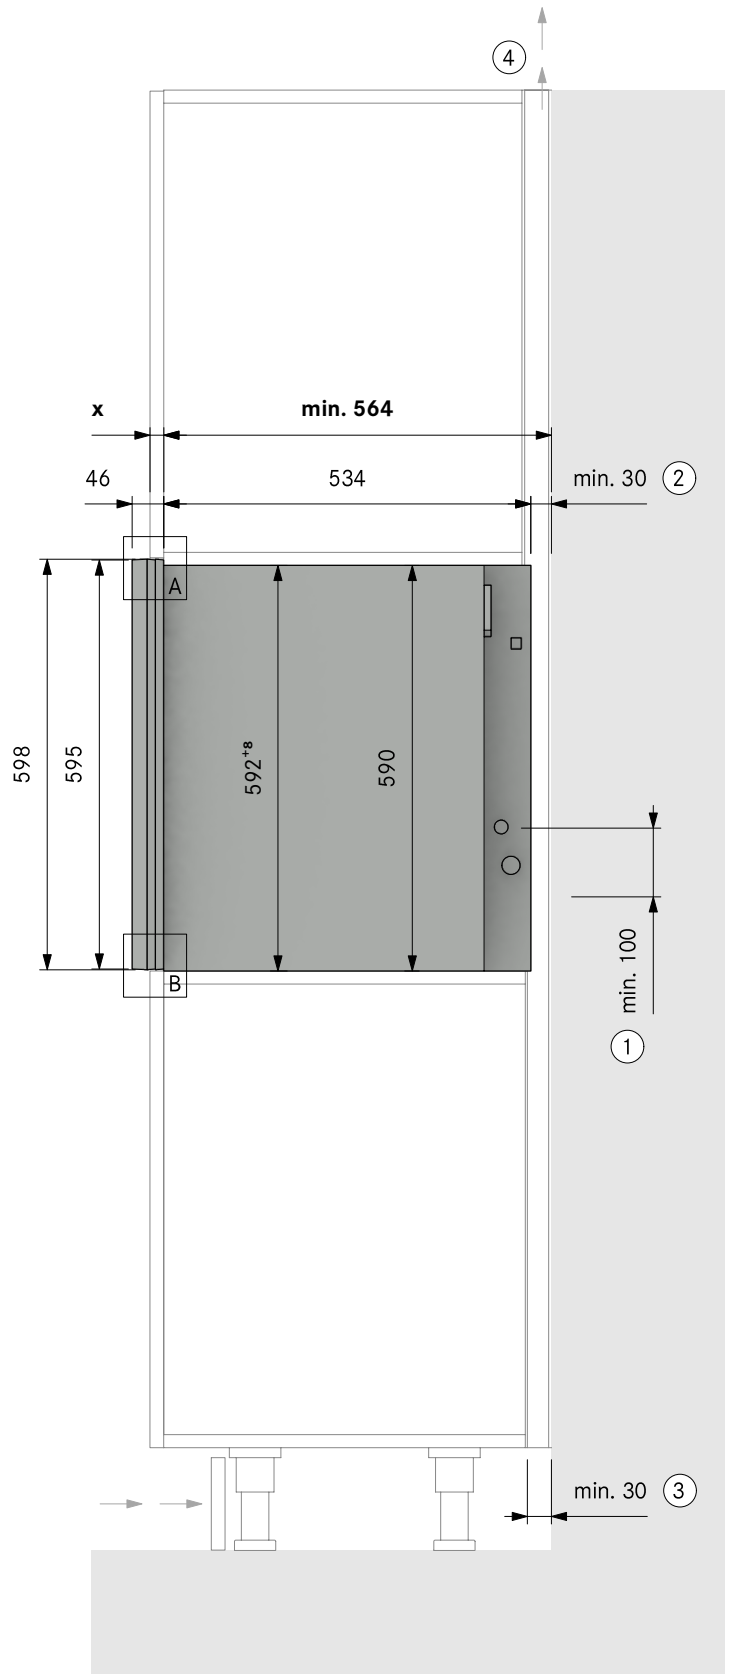

Protruding version with two frame spacers

MODEL PLAN
REFERENCE NUMBER
COMPOSITION

MP_9500
Steam oven

DRAWN 2021



LAYOUT

Side

